| REVISIONS | | | | |
|---|---|---|---|---|
| LTR | DESCRIPTION | E.C.N. | DATE | BY/APP'D |
| A | RELEASE TO DOCUMENT CONTROL | 12563 | 02/19/2001 | AS/MS/SN |

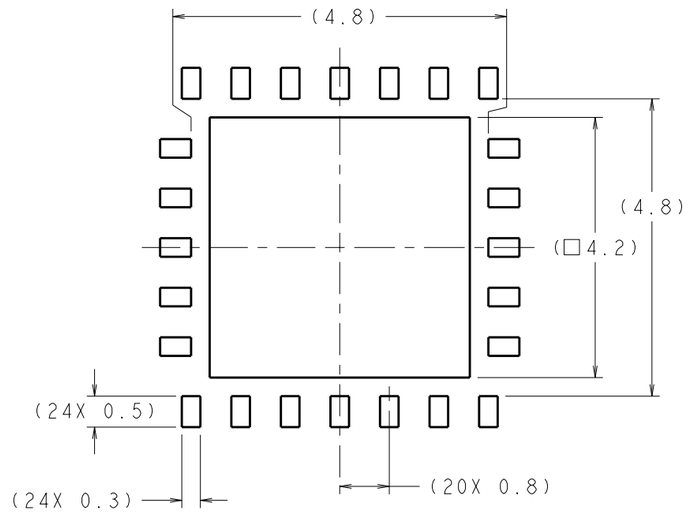


**RECOMMENDED LAND PATTERN**
1:1 RATIO WITH PKG SOLDER PADS

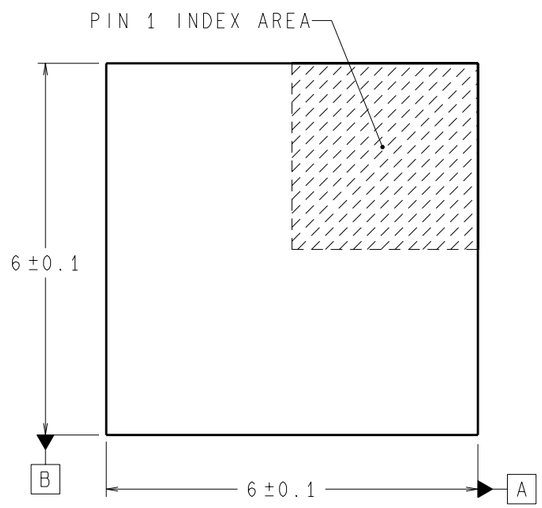


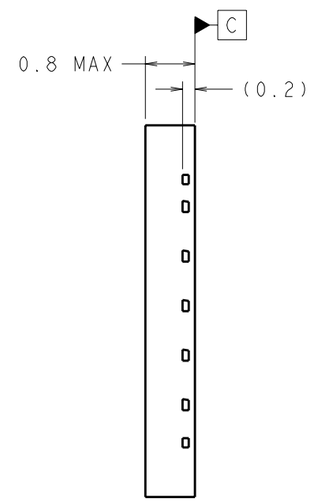


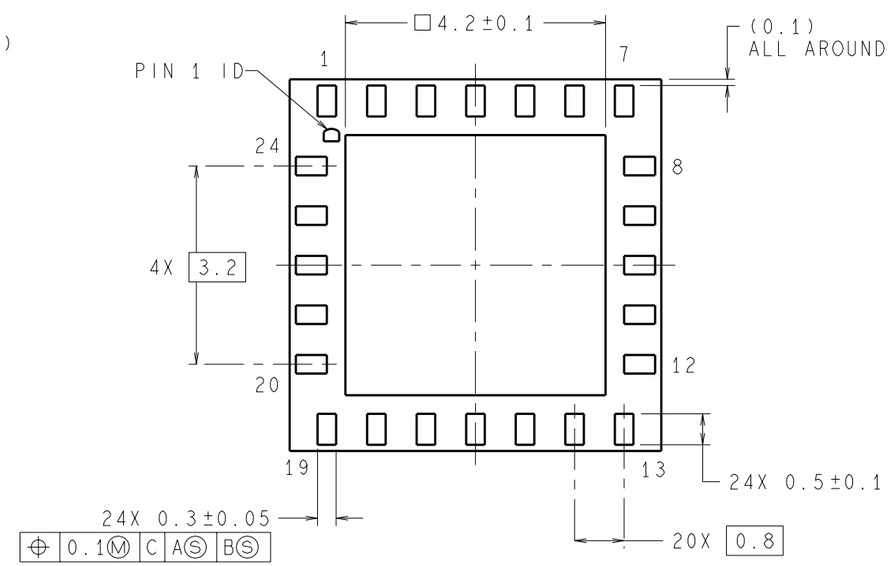


**DIMENSIONS ARE IN MILLIMETERS**

NOTES: UNLESS OTHERWISE SPECIFIED

1. STANDARD LEAD FINISH TO BE 5.08 MICROMETERS MINIMUM LEAD/TIN (SOLDER) ON COPPER.
2. NO JEDEC REGISTRATION AS OF FEBRUARY 2001.

| APPROVALS | DATE |
|---|---|
| DRAWN AFZNIZAM S. | 02/19/2001 |
| DFTG. CHK. MARTA SUCHY | 02/19/2001 |
| ENGR. CHK. N. SANTHIRAN | 02/19/2001 |

PROJECTION INCH [MM]

National Semiconductor
2900 Semiconductor Dr, Santa Clara, CA 95052-8090

LLP, PLASTIC, QUAD,
6 X 6 X 0.8mm BODY,
24 LD, 0.8mm PITCH

| SCALE | SIZE | DRAWING NUMBER | REV |
|---|---|---|---|
| N/A | C | (SC)MKT-LQC24A | A |

DO NOT SCALE DRAWING | SHEET 1 of 1